


Division of Waste Management

Michael F. Easley, Governor
William G. Ross Jr., Secretary
William L. Meyer, Director

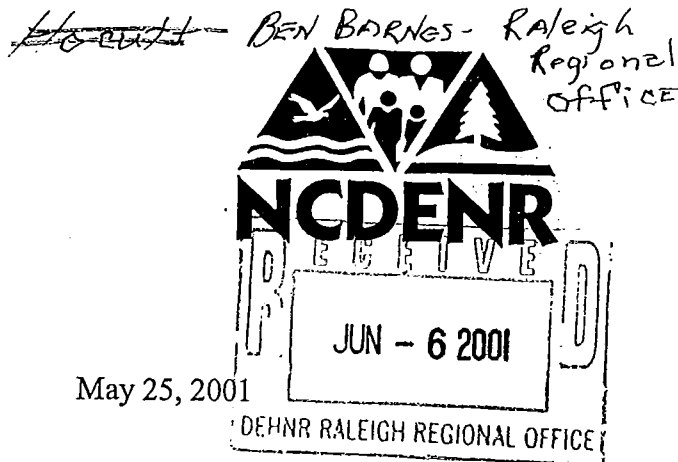

May 25, 2001

Mr. Robert J. Waldrop, Vice President
ReUse Technology, Inc.
665 Molly Lane, Suite 100
Woodstock, GA 30189

Subject: May 4, 2001 Notification Letter of a proposed coal combustion by-products structural fill project named Brandywine Industrial Park to be located in Nash County, NC (near Rocky Mount). This project is planned to utilize approximately 40,000 cubic yards of fly ash with an estimated June 6, 2001 start date and planned for completion June 1, 2004.

Dear Mr. Waldrop:

The subject Notification letter and attachments have been reviewed by Jim Barber and myself. Jim is the Eastern Area Engineer in the Solid Waste Section. Several pieces of necessary additional information have been noted and are described below. Also, because some important design details were not present on the drawings we received we decided to investigate if an incorrect set of drawings were mailed with your letter.

Since the two engineering drawings received were prepared by the Stocks Engineering, P.A. firm, I telephoned Mr. Michael Stocks on May 23rd to inquire if there were other drawings which we should have received. He informed me that the two drawings identified as "Erosion & Sedimentation Control Plan for Brandywine Industrial Park - Nash County, N.C." were the only drawings that he had been commissioned to prepare for you. We are therefore requesting that the following changes be made on these two drawings and forwarded to us along with the four items of additional needed information that are listed in the subsequent section.

On these two drawings, please make the following additions and changes:

- (1) On drawing # C-1, please identify where the limits of the coal ash will be in the project.
- (2) On drawing # C-1, the two stockpiles of topsoil should also be identified as the location and of configuration of two birms which are to be constructed (if that is the case).
- (3) On drawing # C-1, the construction of the sediment basin may become sufficiently clear once the limits of the coal ash are added. If not, please provide a cross sectional drawing.
- (4) On drawing # C-2, General Note # 26 states that in areas of the site where paving is to be applied that the 12 inches of compacted earth and the additional six inches of soil capable of

1646 Mail Service Center, Raleigh, North Carolina 27699-1646

Phone: 919-733-0692 \ FAX: 919-733-4810 \ Internet: www.enr.state.nc.us/

AN EQUAL OPPORTUNITY \ AFFIRMATIVE ACTION EMPLOYER - 50% RECYCLED / 10% POST CONSUMER PAPER

Mr. Robert J. Waldrop
May 25, 2001
Page 2

sustaining vegetative growth will not be applied. This is not an available option. Where paving is to be applied, it will be necessary to place 18 inches of compacted earth prior to paving. This needs to be corrected on the drawing.


The following information or communications need to be furnished to the Solid Waste Section (SWS):

- (1) A copy of Land Quality Division approval of the erosion control plan.
- (2) General Note # 12 on Drawing C-2 states that the U.S. Corps of Engineers and the Division of Water Quality have approved the filling of the wetlands present on this site. A copy of one of those approvals is needed by the SWS.
- (3) Please supply the SWS with a copy of the soils report stating how the minimum of two foot separation from ground water was determined.
- (4) Your May 4, 2001 notification letter reports that an estimated 40,000 tons of coal ash is to be utilized in this project. Please convert these tons and report them in cubic yards.

The timing of a project can be delayed when there are changes, additions or explanations required after a letter of notification has been reviewed. The start and projected closure dates may need to be adjusted.

Please contact me at 919-733-0692, extension # 255 or Bill Hocutt at extension 260 if you have any questions about the contents of this letter.

Sincerely,

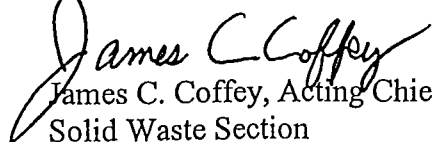
James C. Coffey, Acting Chief
Solid Waste Section

cc: Mark Fry
Jim Barber
Bill Hocutt

c:/wp6docs/letters/ReUse.Brandywine